

PYROSPOT DT 4L

Pyrometer for industrial application

Overview

Digital pyrometer with RS-485 interface



Features

- For temperature measurements between -40 °C and 1000 °C
- $0/4$ to 20 mA temperature linear output, switchable
- RS-485 interface
- Two opto relay outputs, potential-free
- Small sensor head
- Display and programming keyboard

Description and applications

The digital pyrometers PYROSPOT DT 4L are specifically designed for industrial purpose. The devices are suitable for temperature measurement from -40 °C to 1000 °C on many different nonmetallic or coated metallic surfaces.

The solid body allows usage even under rough environmental conditions. The bright temperature display is visible even over long distance. The very small sensor head allows even the acquisition of measuring object which are difficult of access.

The temperature linear standard output signal of $0/4$ to 20 mA allows easy implementation in existing measuring and controlling systems. The device is equipped with a galvanically isolated RS-485 interface, which allows parameterising and software evaluation even in bus systems.

All parameters are adjustable via push-buttons and display directly on the device. Also by using the comfortable parameterising and evaluation software PYROSOFT Spot the parameters can be easily adjusted to the application.



Typical application areas:

- Paper and packaging industry
- Kiln engineering
- Glass and ceramics industry
- Food industry
- Chemical industry

PYROSPOT DT 4L

Pyrometer for industrial application

Technical data

Type	DT 4L					
Temperature range	-40 °C to 1000 °C			0 °C bis 1000 °C		
Device with sensor head cable...	2.5 m	6 m	15 m	2.5 m (HT)	5 m (HT)	15 m (HT)
Part number	4048243211	4048243261	4048243241	4048243212	4048243222	4048243242
Spectral range	8 µm to 14 µm					
Fixed optics	20 : 1					
Internal data processing	digital					
Emissivity ϵ	0.200 to 1.000, adjustable (factory setting when delivered: 1.000)					
Sub temperature range	adjustable within temperature range, minimum span 50 °C					
Response time (t_{95})	100 ms, adjustable up to 100 s					
Measurement uncertainty ¹	1 % of measured value in °C or 1 K ²					
Reproducibility ¹	0.5 % of measured value in °C or 0.5 K ²					
NETD ³	< 0.1 K ⁴					
Output	0/4 to 20 mA, switchable, temperature linear, max. burden 700 Ω					
Interface	RS-485 (galvanically isolated), half duplex, max. baudrate 115 kBd, data protocol Modbus RTU					
More inputs and outputs	input for delete maximum and minimum value storage, 2x opto relay switching outputs, potential-free, max. 60 V DC/42 V AC _{eff} 500 mA					
Data storage	minimum and maximum value storage					
Controls	temperature display, keyboard and display for adjusting parameters					
Parameters ⁵	emissivity, transmission, response time, storage, analog output, sub temperature range, ambient compensation, switching outputs, address, baudrate, temperature unit °C or °F					
Power supply	24 V DC \pm 25 %, residual ripple 500 mV					
Power consumption	approx. 2 W					
Operating temperature	head: 0 °C to 125 °C, electronics box: 0 °C to 70 °C, head (HT): 0 °C to 180 °C					
Storage temperature	-20 °C to 70 °C					
Safety class	IP65 (DIN EN 60529, DIN 40050)					
Weight	approx. 500 g					
Dimensions	approx. 110 mm \times 80 mm \times 40 mm (electronics box)					
CE symbol	according to EU regulations					
Test regulations	EN 55 011: 1998,					
Scope of delivery	DT 4L with sensor head, electronics box, manual, inspection sheet, software PYROSPOT Spot					

¹ Specifications for black body, $T_{\text{ambient}} = 23 \text{ °C}$, $t_{95} = 1 \text{ s}$. ² Whichever is higher value. ³ Noise equivalent temperature difference. ⁴ For $T_{\text{ambient}} = 23 \text{ °C}$, $t_{95} = 500 \text{ ms}$, $\epsilon = 1$, $T_{\text{object}} = 100 \text{ °C}$. ⁵ Adjustable via keyboard and display, and software.

Display and Keyboard



PYROSPOT DT 4L


Pyrometer for industrial application

Optics

Standard optics 20 : 1


Measuring distance a [mm]	0	85	100	200	400	600	800
	Measuring field diameter M [mm]						
DT 4L (-40 °C to 1000 °C)	7.0	6.0	7.0	10.0	25.0	40.0	55.0

Measuring field diameter

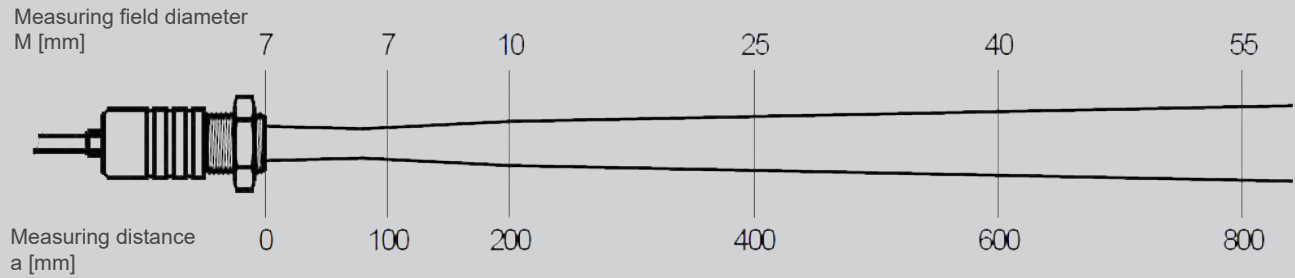

Electronics box

Opened electronics box with feeder clip and relay output

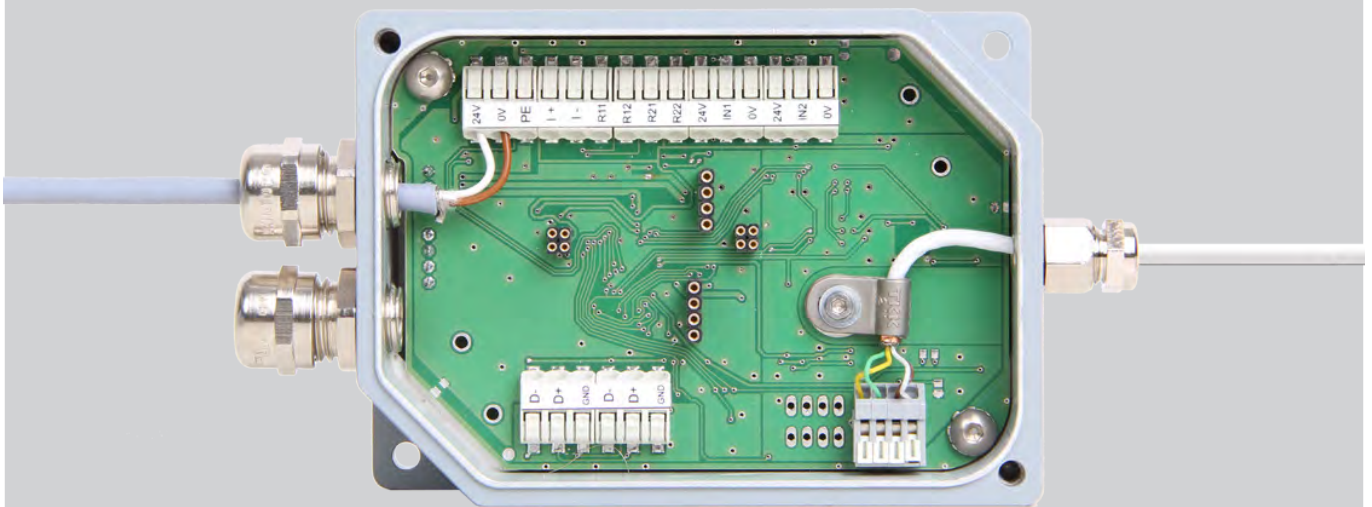

24V	Power supply +24 V DC	D-	D- RS-485
0V	Power supply 0 V DC	D+	D+ RS-485
PE	Potential GROUND, screen	GND	GND RS-485
I +	+ Analog output 0/4 to 20 mA	D-	D- RS-485
I -	- Analog output 0/4 to 20 mA	D+	D+ RS-485
R11	Digital output Relay 1 pin 1, max. 60 V DC/42 V AC _{eff} 500 mA	GND	GND RS-485
R12	Digital output Relay 1 pin 2, max. 60 V DC/42 V AC _{eff} 500 mA		
R21	Digital output Relay 2 pin 1, max. 60 V DC/42 V AC _{eff} 500 mA	NTC gb	Temperature detector, YELLOW (internal detector head)
R22	Digital output Relay 2 pin 2, max. 60 V DC/42 V AC _{eff} 500 mA	NTC gn	Temperature detector, GREEN (internal detector head)
24V	+ Feed-in for function input	DET br	Detector head, detector signal (-), BROWN
IN1	Function input 1, delete data storage	DET ws	Detector head, detector signal (+), WHITE
0V	- Feed-in for function input		
24V	+ Feed-in for function input		
IN2	Function input 2		
0V	- Feed-in for functional input		

PYROSPOT DT 4L

Pyrometer for industrial application


Electrical, mechanical and optical accessories ¹		Part number
Mounting angle	fixed, stainless steel	3310A21014
Air purge unit		3310A22041
Air purge unit	angled	3310A22045
Compact housing	with air purge	3310A22040
Mirror	90°	3310A31030
Interface module	RS-485 to USB	3310A14020

¹ More accessories available.

Accessories

Mounting angle	Air purge unit	Compact housing
Part number: 3310A21014 	Part number: 3310A22041 	Part number: 3310A22040 
Air purge unit, angled	Mirror	Power supply PSU 15
Part number: 3310A22045 	Part number: 3310A31030 	Part number: 3310A14020 

Dimensional drawing pyrometer and sensor head

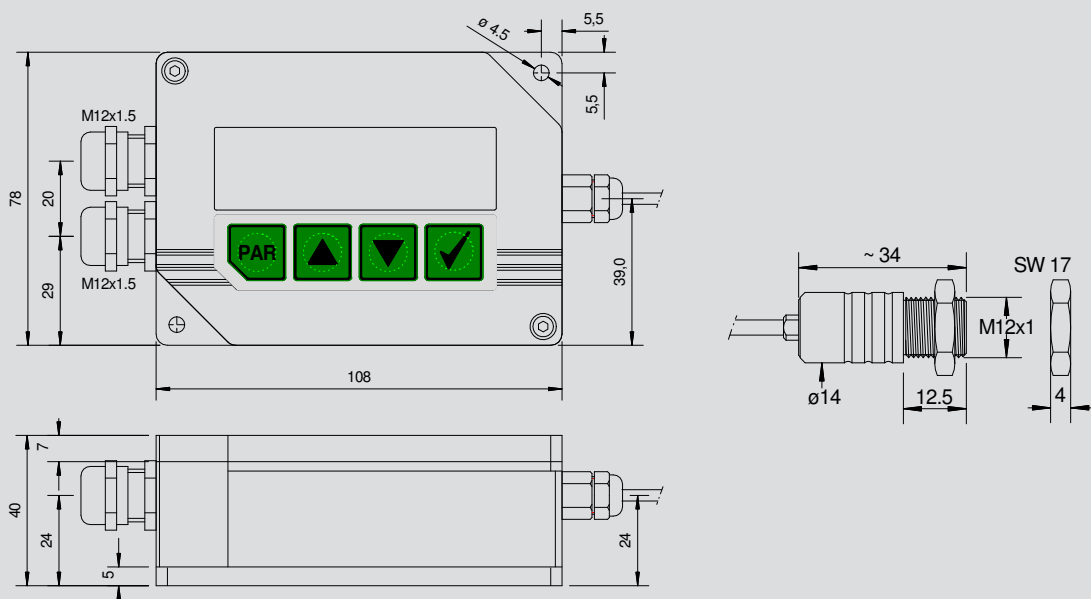

Technische Änderungen vorbehalten. Technical details are subject to change. 04.04.23



Phone: +49 351 896 74-0
Fax: +49 351 896 74-99
Email: info@dias-infrared.de
Internet: www.dias-infrared.com

DIAS Infrared GmbH
Pforzheimer Straße 21
01189 Dresden
Germany

Available in the UK and Ireland from...



01433 620535 sales@tmseurope.co.uk

TMS Europe Ltd was established in 1979 and has offered the DIAS range as the UK & Eire agent of DIAS Infrared GmbH since 2012. DIAS Infrared is based in Dresden, Germany and was founded in 1992.



TMS Europe Ltd is a UKAS accredited calibration laboratory No. 0461. We are ISO 17025 accredited for calibration on site and in our laboratory, as defined in our Schedule Of Accreditation (see www.tmseurope.co.uk/soa).

TMS Europe is also a manufacturer of temperature sensor probes for contact temperature measurement, temperature calibrators and furnaces – amongst many other products.

Part of a range of thermal solutions from TMS Europe



TMS Europe Ltd
Unit 10, Stretfield Mill,
Bradwell, Hope Valley,
S33 9JT, United Kingdom

Tel: 01433 620535
Email: sales@tmseurope.co.uk
Web: www.tmseurope.co.uk

